


-, \$ 1 * 6 8 & + \$ 1 * -, 1 * (/ (& 7 5 2 1 , & 6 7 (& + 1 & 2 2 * † 7 ')

6 2 7 / 3 0 D V W L F (Q F D S V X O D W H)

CJL8205A Dual N-Channel MOSFET

| $V_{(BR)DSS}$ | $R_{DS(on)MAX}$ | I_D |
|---------------|-----------------|-------|
| 20V | 30mΩ@4.5V | 5A |
| | 45mΩ@2.5V | |

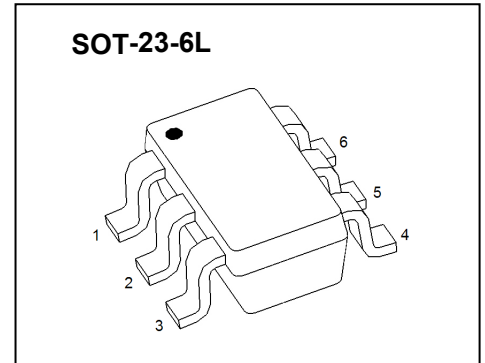


FEATURE

- TrenchFET Power MOSFET
- Excellent $R_{DS(on)}$
- Low Gate Charge
- High Power and Current Handling Capability
- Surface Mount Package


APPLICATION

- Battery Protection
- Load Switch
- Power Management

MARKING



Equivalent Circuit



ABSOLUTE MAXIMUM RATINGS ($T_a=25^\circ\text{C}$ unless otherwise noted)

| Parameter | Symbol | Value | Unit |
|--|-----------------|----------|---------------------------|
| Drain-Source Voltage | V_{DS} | 20 | V |
| Gate-Source Voltage | V_{GS} | ± 10 | V |
| Continuous Drain Current | I_D | 6 | A |
| Pulsed Drain Current (note 1) | I_{DM} | 25 | A |
| Thermal Resistance from Junction to Ambient (note 2) | $R_{\theta JA}$ | 357 | $^\circ\text{C}/\text{W}$ |
| Junction Temperature | T_J | 150 | $^\circ\text{C}$ |
| Storage Temperature | T_{STG} | -55~+150 | $^\circ\text{C}$ |
| Lead Temperature for Soldering Purposes(1/8" from case for 10 s) | T_L | 260 | $^\circ\text{C}$ |

MOSFET ELECTRICAL CHARACTERISTICS

$T_a=25^\circ\text{C}$ unless otherwise specified


| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|---|---------------|---|-----|-----|-----------|------------|
| STATIC CHARACTERISTICS | | | | | | |
| Drain-source breakdown voltage | $V_{(BR)DSS}$ | $V_{GS} = 0V, I_D = 250\mu A$ | 19 | | | V |
| Zero gate voltage drain current | I_{DSS} | $V_{DS} = 18V, V_{GS} = 0V$ | | | 1 | μA |
| Gate-body leakage current | I_{GSS} | $V_{GS} = \pm 10V, V_{DS} = 0V$ | | | ± 100 | nA |
| Gate threshold voltage (note 3) | $V_{GS(th)}$ | $V_{DS} = V_{GS}, I_D = 250\mu A$ | 0.6 | 0.8 | 1.5 | V |
| Drain-source on-resistance (note 3) | $R_{DS(on)}$ | $V_{GS} = 4.5V, I_D = 3A$ | | 23 | 30 | m Ω |
| | | $V_{GS} = 2.5V, I_D = 3A$ | | 30 | 45 | m Ω |
| Forward transconductance (note 3) | g_{FS} | $V_{DS} = 5V, I_D = 4.5A$ | | 12 | | S |
| Diode forward voltage (note 3) | V_{SD} | $I_S = 1.25A, V_{GS} = 0V$ | | | 1.2 | V |
| DYNAMIC CHARACTERISTICS (note 4) | | | | | | |
| Input Capacitance | C_{iss} | $V_{DS} = 8V, V_{GS} = 0V, f = 1MHz$ | | 815 | | pF |
| Output Capacitance | C_{oss} | | | 158 | | pF |
| Reverse Transfer Capacitance | C_{rss} | | | 124 | | pF |
| SWITCHING CHARACTERISTICS (note 4) | | | | | | |
| Turn-on delay time | $t_{d(on)}$ | $V_{DD} = 10V, V_{GS} = 4V, I_D = 1A, R_{GEN} = 10\Omega$ | | 16 | | ns |
| Turn-on rise time | t_r | | | 8 | | ns |
| Turn-off delay time | $t_{d(off)}$ | | | 36 | | ns |
| Turn-off fall time | t_f | | | 18 | | ns |
| Total Gate Charge | Q_g | $V_{DS} = 10V, V_{GS} = 4.5V, I_D = 4A$ | | 14 | | nC |
| Gate-Source Charge | Q_{gs} | | | 2.5 | | nC |
| Gate-Drain Charge | Q_{gd} | | | 2.5 | | nC |

Notes :


- 1.Repetitive rating: Pulse width limited by maximum junction temperature
- 2.Surface Mounted on FR4 board, $t \leq 10$ sec.
3. Pulse test : Pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$.
4. Guaranteed by design, not subject to production.

Typical Characteristics


Output Characteristics

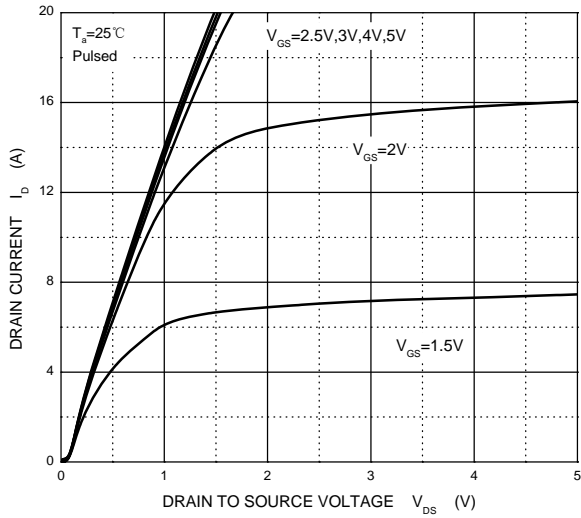


Transfer Characteristics

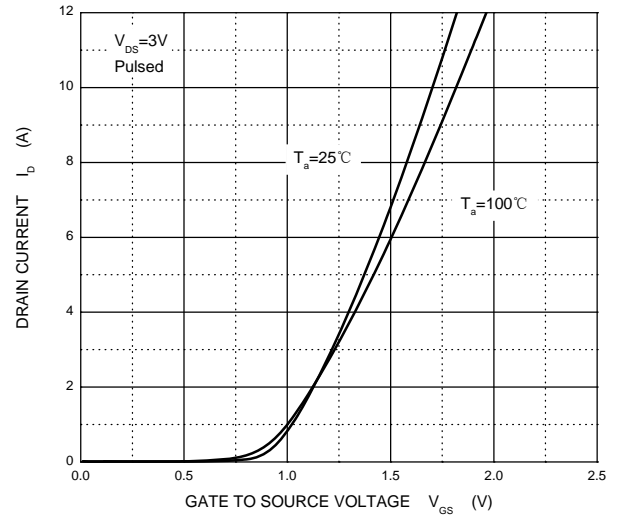


$R_{DS(ON)}$ — I_D

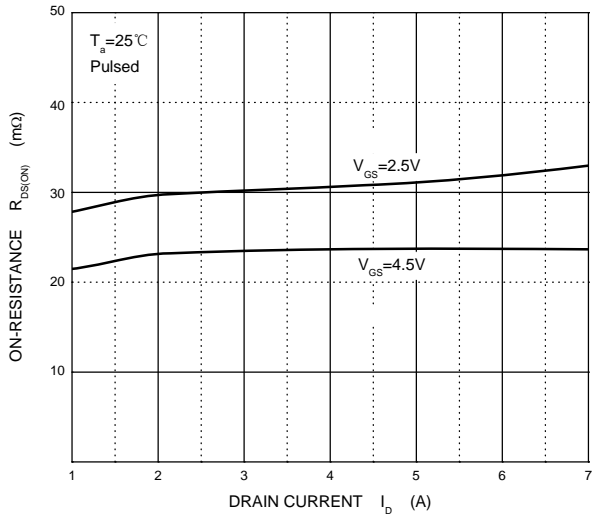


$R_{DS(ON)}$ — V_{GS}

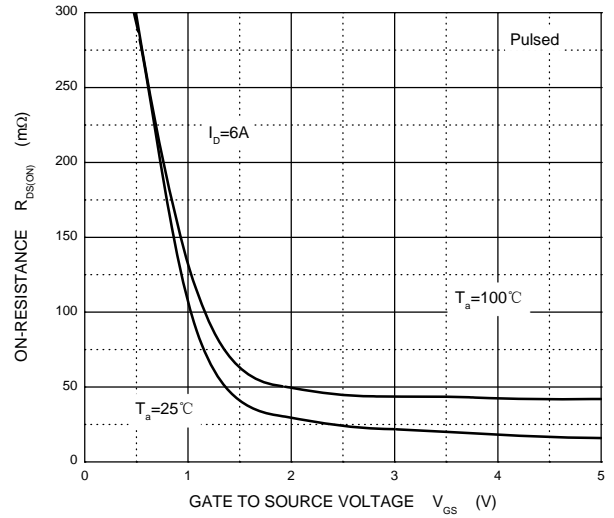


I_S — V_{SD}

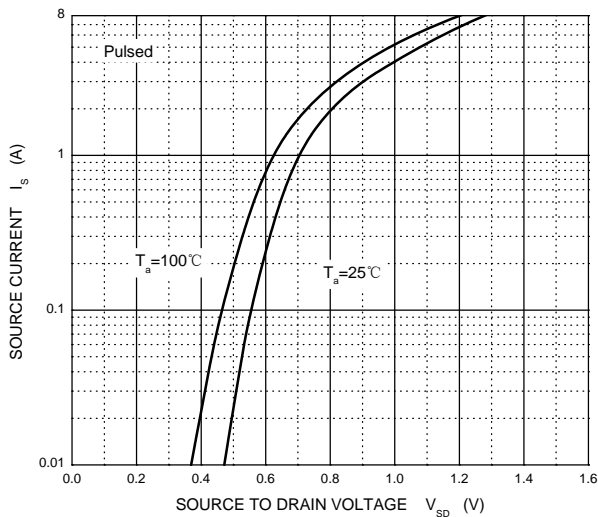

Threshold Voltage

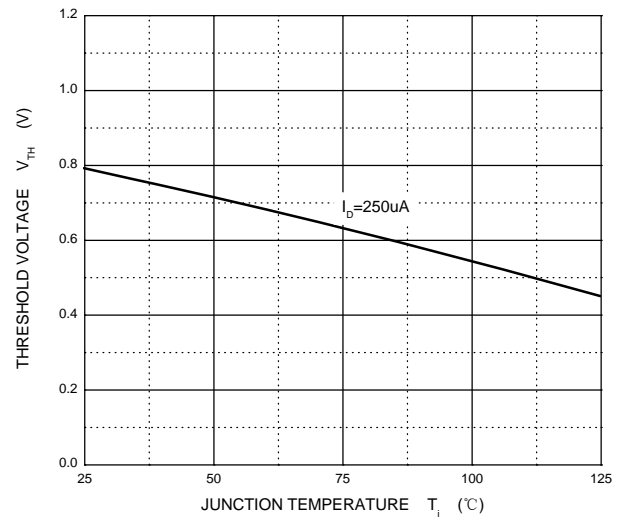


SOT-23-6L Package Outline Dimensions

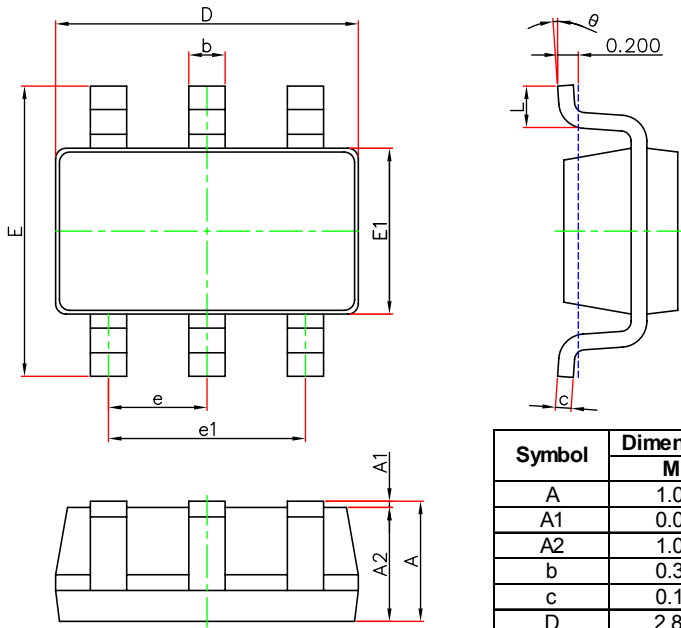

| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|----------|---------------------------|-------|----------------------|-------|
| | Min. | Max. | Min. | Max. |
| A | 1.050 | 1.250 | 0.041 | 0.049 |
| A1 | 0.000 | 0.100 | 0.000 | 0.004 |
| A2 | 1.050 | 1.150 | 0.041 | 0.045 |
| b | 0.300 | 0.500 | 0.012 | 0.020 |
| c | 0.100 | 0.200 | 0.004 | 0.008 |
| D | 2.820 | 3.020 | 0.111 | 0.119 |
| E1 | 1.500 | 1.700 | 0.059 | 0.067 |
| E | 2.650 | 2.950 | 0.104 | 0.116 |
| e | 0.950(BSC) | | 0.037(BSC) | |
| e1 | 1.800 | 2.000 | 0.071 | 0.079 |
| L | 0.300 | 0.600 | 0.012 | 0.024 |
| θ | 0° | 8° | 0° | 8° |

SOT-23-6L Suggested Pad Layout

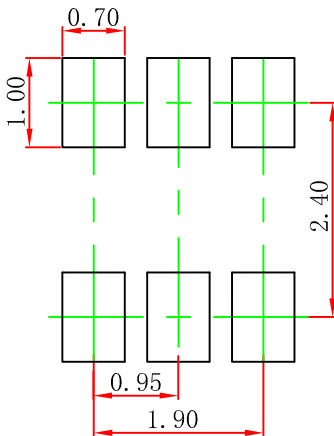


Note:

1. Controlling dimension: in millimeters.
2. General tolerance: ± 0.05 mm.
3. The pad layout is for reference purposes only.

127, & (- 6 & - UHVH VVWUHL JWW D N P R G L I L F D W L R Q V H Q K D Q F H P H Q W V R L R S U K R Y H P H Q W F K D Q J L W K I R X W Q R W W B Q S U R G X F W H 6 Q - G R H Q R D W V X B Q O L D E L L O L L W L Q J R X W R I W K H D S S O L F D W L R Q R U X V H R I D Q \ S U R G X F W G H V F U L E H G K H U

SOT-23-6L Tape and Reel

SOT-23-6L Embossed Carrier Tape

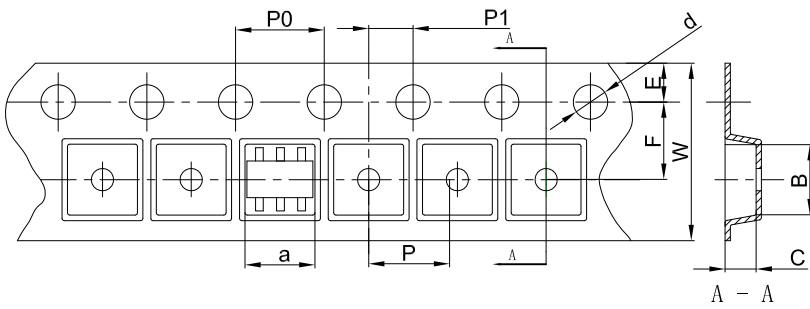


Packaging Description:


SOT-23-6L parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 3,000 units per 7" or 18.0cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

| Dimensions are in millimeter | | | | | | | | | | |
|------------------------------|------|------|------|-------|------|------|------|------|------|------|
| Pkg type | a | B | C | d | E | F | P0 | P | P1 | W |
| SOT-23-6L | 3.17 | 3.23 | 1.37 | Ø1.55 | 1.75 | 3.50 | 4.00 | 4.00 | 2.00 | 8.00 |

SOT-23-6L Tape Leader and Trailer

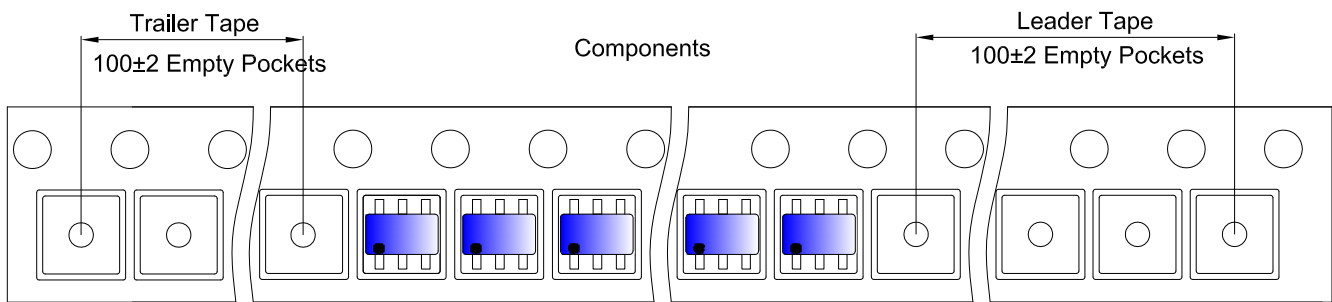

SOT-23-6L Reel

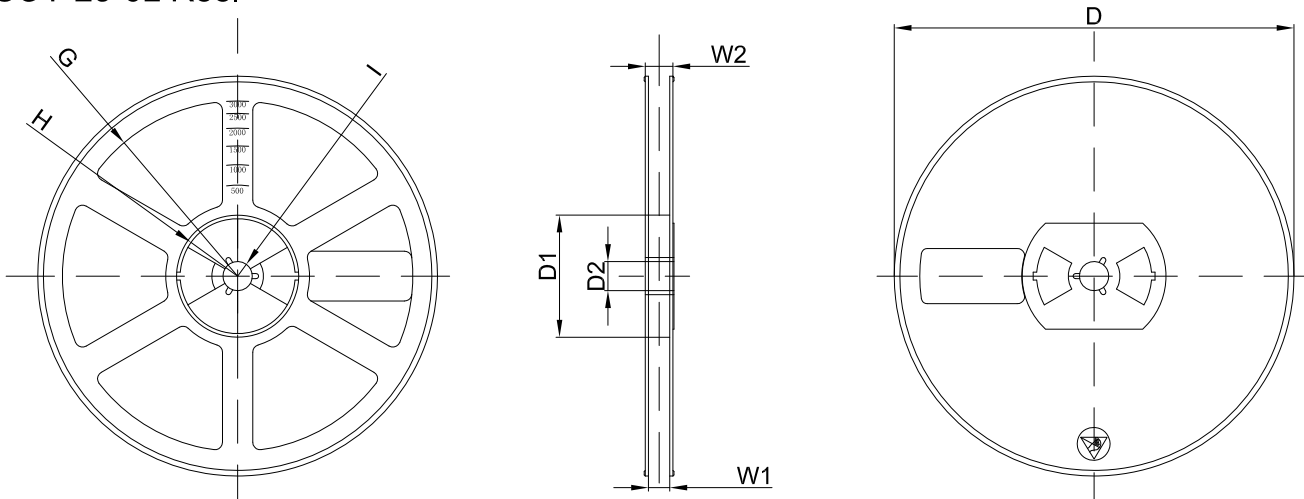

| Dimensions are in millimeter | | | | | | | | |
|------------------------------|---------|-------|-------|--------|--------|-------|------|-------|
| Reel Option | D | D1 | D2 | G | H | I | W1 | W2 |
| 7" Dia | Ø180.00 | 60.00 | 13.00 | R78.00 | R25.60 | R6.50 | 9.50 | 13.10 |

| REEL | Reel Size | Box | Box Size(mm) | Carton | Carton Size(mm) | G.W.(kg) |
|----------|-----------|------------|--------------|-------------|-----------------|----------|
| 3000 pcs | 7 inch | 30,000 pcs | 203×203×195 | 120,000 pcs | 438×438×220 | |